

DH-HAC-HFW1200TH-I4-A

2MP IR HDCVI Fixed-focal Bullet Camera



* The parameters and datasheets below can only be applied to 1200-S6 series.

- Max. 30 fps@1080p
- Smart IR Illumination
- 40 m illumination distance.
- Super Adapt.
- Built-in Mic.
- 3.6 mm fixed lens (2.8mm optional).
- CVI/CVBS/AHD/TVI switchable.
- IP67, 12 VDC.



System Overview

The Lite Series is a great choice for consumers looking for high quality monitoring products at a reasonable price. Its low cost and high performance make it ideal for residential areas and SMB solutions. This series is equipped with a wide range of technologies, such as full-color and starlight, providing various solutions for different scenarios.

Functions

Super Adapt

With its intelligent algorithm, the camera automatically adjusts its parameters to provide optimal performance and vivid images.

Broadcast-quality Audio

Audio signal transmission over coaxial cables is supported by the HDCVI camera. It adopts a unique audio processing and transmission technology that restores source audio and eliminates noise, ensuring the quality and reliability of the audio information that is collected. This becomes important for video surveillance applications that use audio information as a type of supplementary evidence.

Advanced 3DNR

Dahua's advanced 3DNR technology reduces image noise with little to no impact on image sharpness, especially in poor lighting conditions. It detects the noise, and compares the sequential frames to effectively reduce the noise. It also makes efficient use of bandwidth, saving on storage space.

Smart IR Illumination

With its IR illumination, the camera provides optimal performance in low light conditions, ensuring uniformity in the brightness of B/W images. Through its smart IR technology, the camera also compensates for the distance of targets by adjusting the intensity of its IR LEDs, preventing overexposure of images as targets move closer to the camera.

Protection (IP67, Wide Voltage)

IP67: The camera passed a series of rigorous dust and immersion tests. Its enclosure is both dust-proof and waterproof, and can function normally while being immersed in 1 m deep water for up to 30 minutes.
Wide voltage: The camera has $\pm 30\%$ input voltage tolerance (for some power supplies) and a wide voltage range, making it suitable for a variety of outdoor scenarios.

4 Signals over 1 Coaxial Cable

HDCVI technology supports 4 signals (video, audio*, data and power) which are simultaneously transmitted over a coaxial cable. Dual-way data transmission allows the HDCVI camera to interact with the XVR to perform various actions such as sending control signals and triggering alarms. HDCVI technology also supports PoC, which makes the camera easy and quick to install.

* Audio input is available for select HDCVI camera models.

Long Distance Transmission

HDCVI technology provides long distance transmission in real time without transmission loss. It supports transmission distances up to 700 m for 2-MP/5-MP/8-MP HD videos through coaxial cables, and up to 300 m through UTP cables. The results were obtained and verified through rigorous testing in Dahua's test laboratory.

Technical Specification						Noise Reduction	3D NR
Camera						Illumination Mode	Smart IR
Image Sensor		2 MP CMOS				Mirror	Yes
Max. Resolution		1920 (H) × 1080 (V)				Privacy Masking	Off/On (8 areas, rectangle)
Scanning System		Progressive				Certification	
Electronic Shutter Speed		PAL: 1/25 s–1/100000 s NTSC: 1/30 s–1/100000 s				Certifications	CE-LVD: EN 62368-1; CE-EMC: EN 55032; EN 55035; FCC: 47 CFR FCC Part 15, Subpart B
Min. Illumination		0.01 lux@F2.0 (Color, 30 IRE) 0.001 lux@F2.0 (B/W, 30 IRE) 0 lux (Illuminator on)				Port	
S/N Ratio		>65 dB				Video Output	Video output choices of CVI/TVI/AHD/CVBS by one BNC port
Illumination Distance		40 m (131.23 ft)				Audio Input	One channel built-in Mic
Illuminator On/Off Control		Auto				Power	
Illuminator Number		1 (IR light)				Power Supply	12 VDC ± 30%
Angle Adjustment		Pan: 0°–360° Tilt: 0°–90° Rotation: 0°–360°				Power Consumption	Max 3.2 W (12 VDC, IR on)
Lens						Environment	
Lens Type		Fixed-focal				Operating Temperature	–40 °C to +60 °C (–40 °F to +140 °F)
Lens Mount		M12				Operating Humidity	<95% (RH), non-condensing
Focal Length		2.8 mm; 3.6 mm				Storage Temperature	–40 °C to +60 °C (–40 °F to +140 °F)
Max. Aperture		F2.0				Storage Humidity	<95% (RH), non-condensing
Field of View		2.8 mm: H: 102°; V: 60°; D: 129° 3.6 mm: H: 83°; V: 48°; D: 104°				Protection	IP67
Iris Control		Fixed				Structure	
Close Focus Distance		2.8 mm: 0.5 m (1.64 ft) 3.6 mm: 0.7 m (2.30 ft)				Casing Material	Metal front cover + plastic rear barrel + metal bracket
DORI Distance	Lens	Detect	Observe	Recognize	Identify	Product Dimensions	240.7 mm × 90.7 mm × 90.4 mm (9.48" × 3.57" × 3.56")
	2.8 mm	41.4 m (135.83 ft)	16.5 m (42.13 ft)	8.3 m (27.23 ft)	4.1 m (13.45 ft)	Net Weight	0.41 kg (0.90 lb)
	3.6 mm	50.9 m (166.99 ft)	20.3 m (66.60 ft)	10.2 m (33.46 ft)	5.1 m (16.73 ft)	Gross Weight	0.62 kg (1.37 lb)
						Installation	Wall mount; ceiling mount; vertical pole mount
Video							
Video Frame Rate		CVI: PAL: 1080p@25 fps; NTSC: 1080p@30 fps; AHD: PAL: 1080p@25 fps; NTSC: 1080p@30 fps; TVI: PAL: 1080p@25 fps; NTSC: 1080p@30 fps; CVBS: PAL: 960H; NTSC: 960H					
Resolution		1080p (1920 × 1080); 960H (960 × 576/960 × 480)					
Day/Night		Auto(ICR)/Color/B/W					
BLC		BLC; HLC; DWDR					
WDR		DWDR					
White Balance		Auto; Area white balance					
Gain Control		Auto					

Ordering Information		
Type	Model	Description
2MP Camera	DH-HAC-HFW1200THP-I4-A	2MP IR HDCVI Fixed-focal Bullet Camera, PAL
	DH-HAC-HFW1200THN-I4-A	2MP IR HDCVI Fixed-focal Bullet Camera, NTSC
Accessories (Optional)	PFA135	Junction Box
	PFA130-E	Water-proof Junction Box
	PFA152-E	Pole Mount Bracket
	PFM800-E	1 Channel Passive HDCVI Balun
	PFM321D	12V 1A Power Adapter
	PFM904	Integrated Mount Tester

Accessories

Optional:



PFA135
Junction
Box



PFA130-E
Water-proof Junction
Box



PFA152-E
Pole Mount
Bracket




PFM800-E
1 Channel Passive
HDCVI Balun



PFM321D
12V 1A Power
Adapter



PFM904
Integrated Mount
Tester

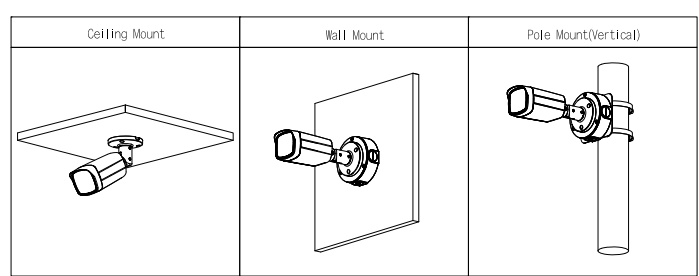

Dimensions (mm [inch])

